

WeldTec®

Clear Quartz Nozzles

Clear quartz glass TIG nozzles for WeldTec® and most standard torches.

... not just glass ... but Fused Quartz glass ...

- 3 times the temperature resistance of Pyrex® glass
- Zero heat shock breakage due to temperature changes
- Tougher than Pyrex® for better durability
- Does not out gas impurities like Pyrex®
- Does not discolor turning yellow/brown like Pyrex®

TEC introduced the glass nozzles to TIG torches back in 1955.

These modern fused quartz nozzles offer superior temperature and thermal shock resistance, surpassing Pyrex®, lava and the pink ceramic nozzles for performance.

You can use these quartz nozzles on most industry standard TIG torches using a simple adapter ring. Available in several orifice sizes and several lengths to suit your job requirements.
















Made in America.



WT-9, 20 with gas lens. WT-24 with gas lens.


ORDERING INFORMATION

TORCH SERIES**	DESCRIPTION	PART NO.	QUARTZ NOZZLE	LENGTH	ORIFICE	SIZE	PART NO.
WT-17, 18, 26	ADAPTER RING 	10NQA	 #7L	1 3/4"	7/16"	# 7	10NQ-7L
WTB-17, 18 WTF-17, 18 WTR-17, 18	NOZZLE GASKET 	10NQG	 #9L	1 3/4"	9/16"	# 9	10NQ-9L
R-17FV, 17V							
WT-9, 20, 24, 25	ADAPTER RING 	13NQA-2	STANDARD LONG  #5L	1"	5/16"	# 5	<u>STANDARD</u> 13NQ-5
WTB-9, 20 WTF-9, 20 WTR-9, 20	GAS LENS 	45V43NQ (1/16) 45V44NQ (3/32) 45V45NQ (1/8)	 #7	1" 1" 1"	7/16" 9/16"	# 7 # 9	13NQ-7 13NQ-9
R-9FV, 9V			 #7L	1 3/4"	5/16"	# 5	<u>LONG</u> 13NQ-5L
SW-320	NOZZLE GASKET 	53N66	 #9L	1 3/4" 1 3/4"	7/16" 9/16"	# 7 # 9	10NQ-7L 10NQ-9L
	(USE WITH WT-24 SERIES)						


**Also usable on other brand compatible models.

Specifications subject to change without notice.

WT-9, 20, 25 TORCH SERIES

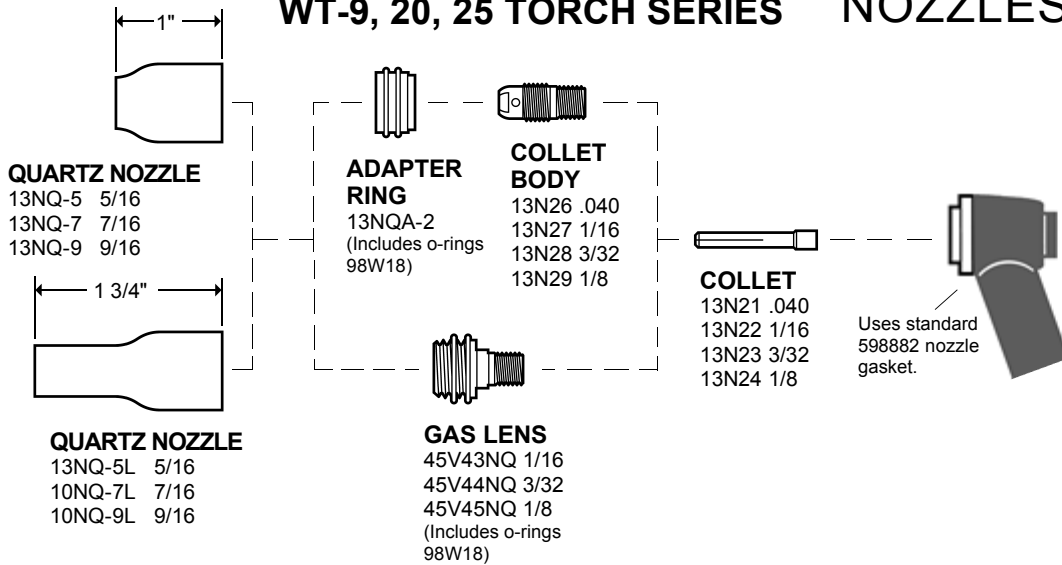

WT-17, 18, 26 TORCH SERIES

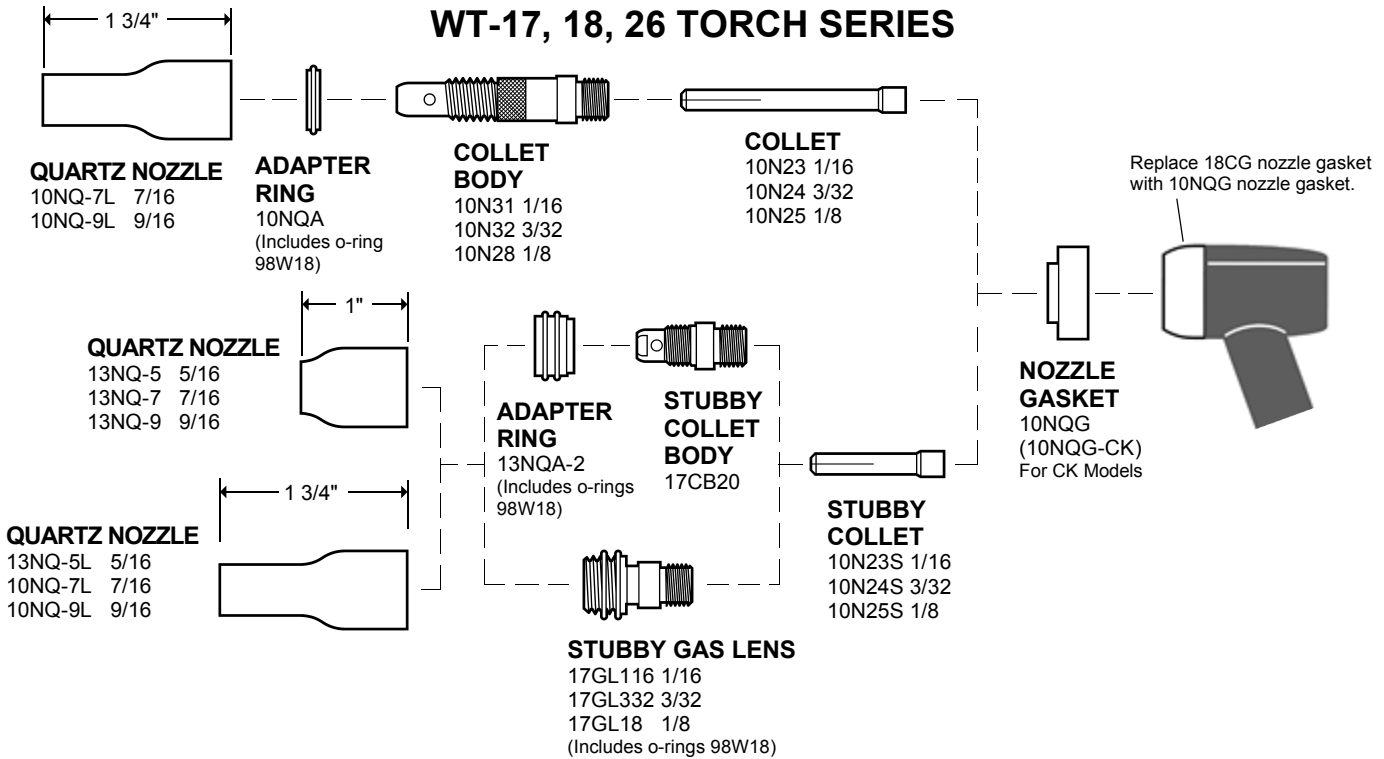

WT-24 TORCH SERIES

